

# LIGHT EMITTING DIODES 1.6÷4.6 μm


## Model **LED27-TEC** **2.7 mm 6 mW**

- Light Emitting Diodes **LED27-TEC** are designed for emitting at a spectral range around 2700 nm. Thermocooler and thermoresistor are mounted inside 9 mm package TO-5. Heterostructures (HS) are grown on InAs substrates
- Light Emitting Diodes **LED27-TEC** are developed for using in optical gas sensors and medical diagnostics. Such construction gives possibility for temperature stabilization of LED parameters. Lifetime is more then 10000 hours.
- Related products: **LED27** can be used in optical pair with our photodiodes **PD36**. Our standard **LED Driver** provides power supply of **LED27-TEC** in two recommended here regimes (Quasi-CW and Pulsed).




Parameters	Min	Typ	Max
Wavelength, μm	2.60	2.70	2.80
FWHM, μm	0.40	0.50	0.60
Optical Power, μW			
Quasi-CW @ 200 mA	4	6	8
Pulsed @ 2A	100	120	140
Switching Time, ns	10	30	50
Range of temperature control °C	-10÷+60		
Emitting Area, μm	300x300		
Soldering temperature	95 °C		
Package	TO-5 with thermocooler and thermistor		

Recommended regimes of LED operation

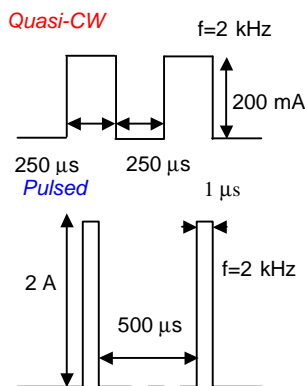

Main thermocooler parameters (without load)

$I_{max}$ (Amps)	$Q_{max}$ (Watts)	$U_{max}$ (Volts)	$\Delta T_{max}$ °C
0.7	0.4	1.0	67

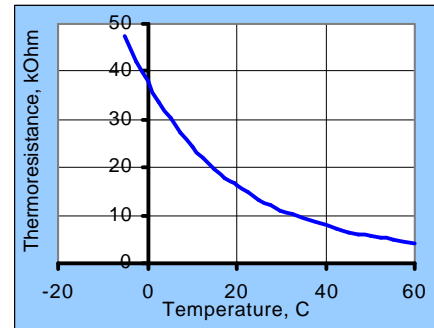

Package TO-5

